

Peripheral Devices

Remote Alarm Lamps Models RL-HC and RL-HW

ARCHITECT AND ENGINEER SPECIFICATIONS



Model RL-HW
[Wall]

- Designed for use with initiating devices that are concealed or otherwise not exposed to view
- Becomes second accessory (used with relay or audible base)
- Capable to readily identify well-placed types of initiating devices
- UL Listed and ULC Listed; FM, CSFM & NYC Fire Dept. Approved



Model RL-HC
[Ceiling]

Product Overview

The Remote Alarm Lamps (Models RL-HW and RL-HC) are designed for use with initiating devices that are concealed or otherwise not exposed to view (e.g. — in false ceilings, under sub-floors, in unexposed ventilating ducts, normally locked vaults, within computer consoles, etc.) Even though the device initiating the alarm is out of sight, these remote alarm-lamp assemblies will readily identify those unique and strategically placed types of initiating devices.

Model RL-HC is designed for mounting to a 4" octagon outlet box, and Model RL-HW is designed for mounting on a standard single-gang switch box. Although there is no mounting limitation, Model RL-HC is normally ceiling mounted, while Model RL-HW is normally mounted to a wall. The remote lamps may be placed up to 25 feet from the detector and use 14-to-18 gauge, 3-conductor wire.

Specifications


Models RL-HW and RL-HC have screw-type terminals for ease of installation.

The mounting plates for both alarm lamps are comprised of an off-white plastic, presenting an attractive appearance that will blend with any decor.

Details for Ordering

Model	Part Number	Description
RL-HC	500-033230	Remote Lamp, Ceiling
RL-HW	500-033310	Remote Lamp, Wall

Mounting Diagram

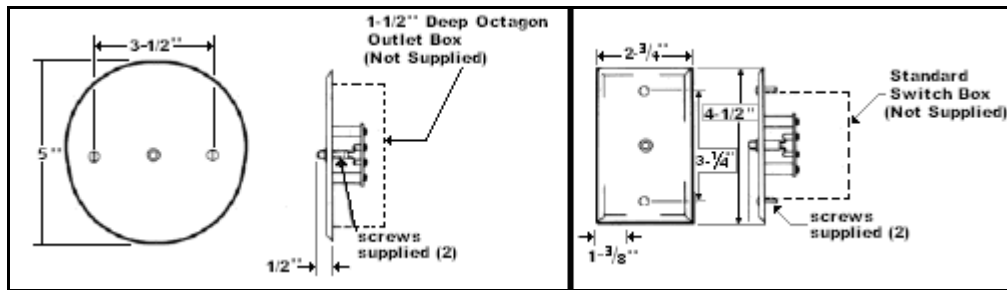

Model RL-HC
[Ceiling]

Model RL-HW
[Wall]

Notice: This marketing data sheet is not intended to be used for system design or installation purposes. For the most up-to-date information, refer to each product's installation instructions.