


DH-PFA150-T

Pole Mount Bracket



- Built of SECC and SUS304 material.
- Simple, elegant and convenient to use.
- Supports being installed on large vertical poles.
- The enhanced buckle makes the pole bracket tighter and firmer.



System Overview

Dahua Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

Scene

Works with front-end devices and in temperatures ranging -40°C to $+60^{\circ}\text{C}$ (-40°F to $+140^{\circ}\text{F}$) with humidity $< 90\%$.

Technical Specification

Structure

Material	SECC, SUS304
Packaging Dimensions	177.0 mm × 80.0 mm × 177.0 mm (6.97" × 3.15" × 6.97") (L × W × H)
Product Dimensions	130.4 mm × 170.0 mm × 45.0 mm (5.13" × 6.69" × 1.77") (L × W × H)
Net Weight	1.35 kg (2.98 lb)
Gross Weight	1.43 kg (3.15 lb)
Load bearing	12.0 kg (26.46 lb)
Installation	Pole Mount
Pole Diameter	Φ100 mm–270 mm (Φ3.94"–10.63")
Applicable Model	Please see "Camera Accessories Selection"
Appearance Color	White

Environment


Operating Temperature	-40°C to $+60^{\circ}\text{C}$ (-40°F to $+140^{\circ}\text{F}$)
Operating Humidity	$< 90\%$ (RH)

Storage Temperature	-40°C to $+80^{\circ}\text{C}$ (-40°F to $+176^{\circ}\text{F}$)
Storage Humidity	10%–90% (RH)


Ordering Information

Type	Model	Description
Camera Mount	DH-PFA150-T	Pole Mount Bracket

Installation

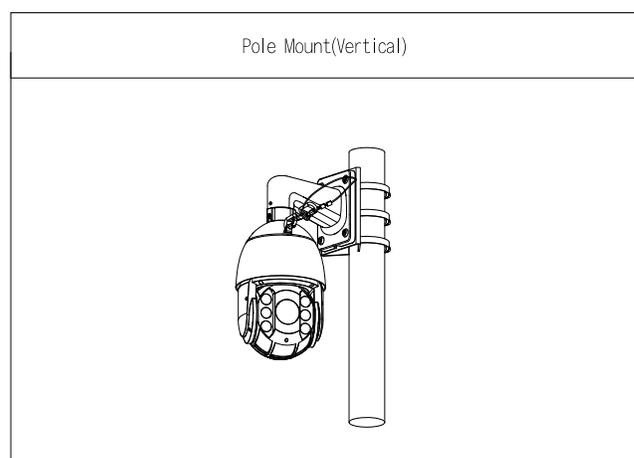

Dimensions (mm[inch])

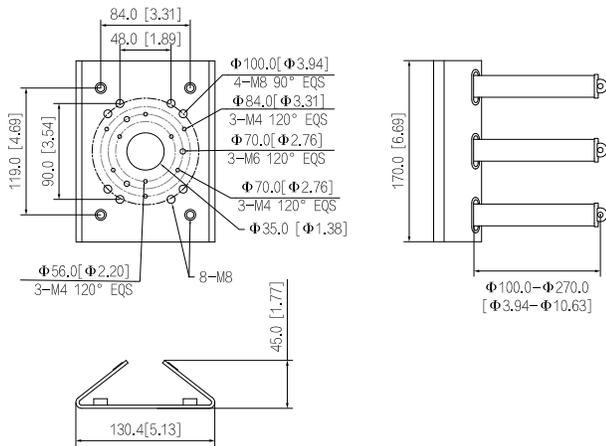

Package Information

- Pole mount bracket × 1
- M8 × 25 screw × 4
- 100-270 mm metal hoop: 3
- S6.0 wrench × 1
- M6 × 14 screw × 3